



FEATURES

Lead-free brass construction
 1 stream mode: aerated
 Single volume and temperature lever control
 145° spout rotation
 3/8" connection

Ceramic cartridge #ALT75555600




Flow rate: 1.8 gpm - 6.8L/min
 Mounting hole: 1-1/2"
 Counter depth: min 1-3/8" max 2-3/8"

FINISHES

Polished chrome (PC) Brushed Nickel PVD (BNVD)
 Electro Black (EBK) Sunset PVD (SUVD)
 White (WH)

CERTIFICATIONS & COMPLIANCE

ASME A112.18.1 NSF/ANSI 61 and 372
 CSA B125.1 EPA WaterSense®
 ADA

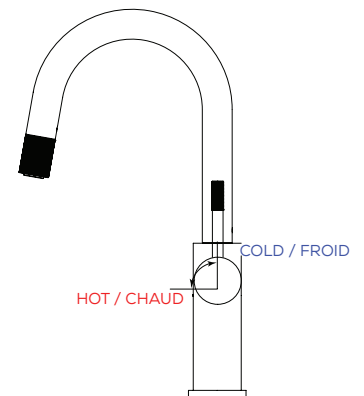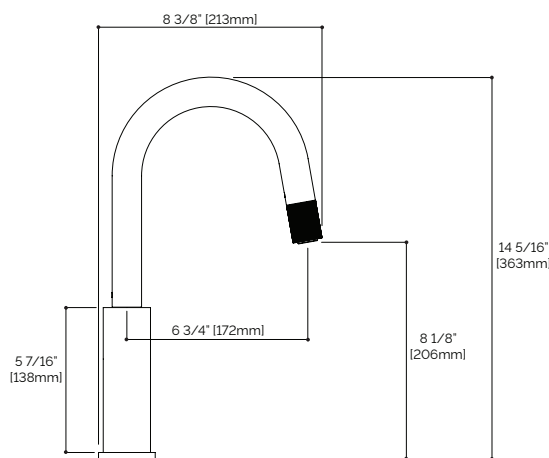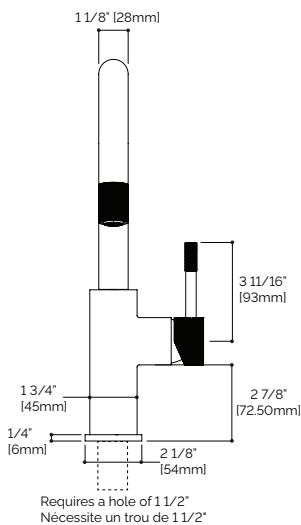

Quick access to warranty
 and support:

