



XPress thermostatic valve with diverter 2 or 3 way



FEATURES

Solid brass

Fluehs German-made 1/2" thermostatic cartridge Reversible service check valves with filters Diverter test cap Removable NPT plug on the top outlet


Removable NPT plug on the top outlet 1/2" female water inlets / outlets - NPT

Flow rate: 10.8 gpm (40L/min)

CERTIFICATIONS & COMPLIANCE

ASME A112.18.1 CSA B125.1



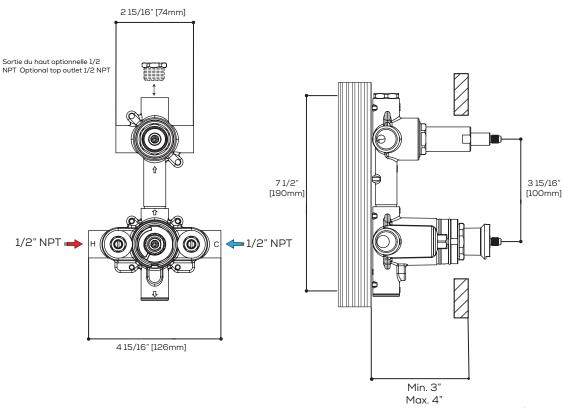

Quick access to warranty and support:



Aquabrass cannot be held responsible for any technical, typographical errors or omissions contained within this document and reserves the right to make changes without prior notice.

Last revision: 11/12/2024 aquabrass.com